HOLO/OR DESIGN & MANUFACTURE OF DIFFRACTIVE OPTICAL ELEMENTS

# PN: BD-018-Q-Y-A

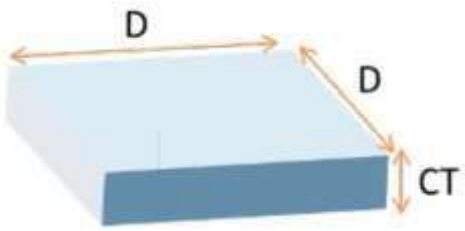


| INPUT PARAMETER | |
|---|---|
| Wavelength [nm]: | Polychromatic |
| Beam Mode (SM/MM): | SM or MM |
| Minimum Beam Diameter [mm]: | >1.2 |

| ELEMENT PARAMETER | |
|---|---|
| Element Type: | Window |
| Material: | Fused Silica |
| Element Size [mm]: | 34x34 |
| Clear Aperture [mm]: | 33x33 |
| Thickness [mm]: | 1.524 |
| Coating: | AR/AR coating |

| OUTPUT PARAMETER | |
|---|---|
| Output Shape: | square |
| Full angle [deg]: | 12.8x12.8±1.28 |
| Transmission efficiency: | Close to 100% |
| Overall Efficiency: | >90% |

**Holo/Or can improve the performances of this item. Please send us your requirements**